

## CONTAINERIZED PRESSURE TEST BAY (40 FT)

type PPU40-S3

**The Resato containerized pressure test bay allows pressure testing equipment on site up to 38 ft object length, without the need of building a pressure test bay.**

The dedicated designed high pressure test system allows both hydraulic function tests on tools, as hydrostatic body tests, all operated from the integrated control room.

Positioning the tool in the test bay is easily performed by means of the extendable overhead crane which includes one fully electric 3 tons hoist.

Spilled test fluids are captured and collected by an integrated grid floor in the test bay. The filtration system in combination with reservoir allows recycling of the test medium. This complete pump circulation system is able to handle a wide range of fluids.

### KEY SAFETY FEATURES

10mm steel test bay wall with 18 mm plywood lining

Flashing lights

Door switches and door locks

No high pressure components outside the test bay

Emergency stop buttons both in control room as test bay

Camera system

---

### ORDERING CODE


PPU40-S3

☎ +31 (0) 50 501 6877

✉ hpsales@resato.com

🌐 www.resato.com

---

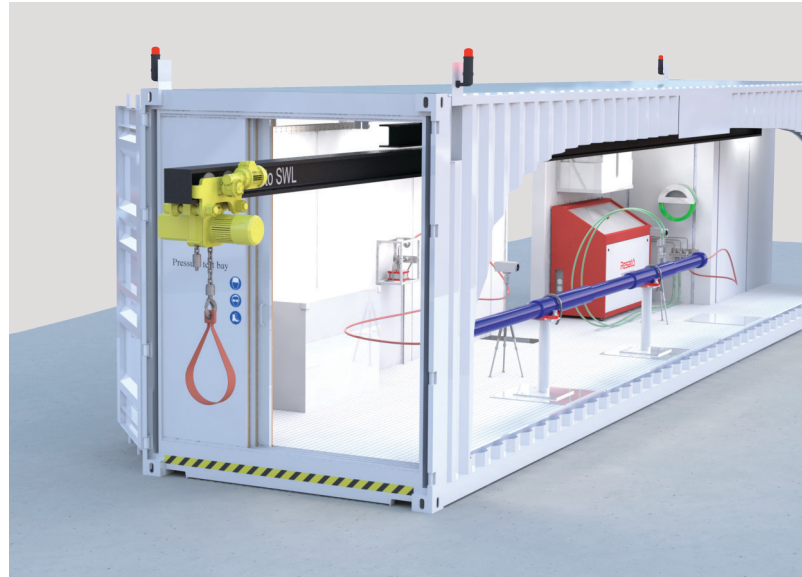

### KEY TESTING FEATURES

Dual hydrostatic test line: 11,500 psi

Hydraulic open/close control line: 10,000 psi

Low pressure/high volume and high pressure/low volume pump setup

De-air skid

### KEY CONTAINER FEATURES

Object length up to 38ft

Container length 40ft

CSC certified for top layer





Fully grid floor in test bay

Zinc coating + 2K coat

Air conditioning in control room and test bay

**CONTAINERIZED PRESSURE TEST BAY (40 FT)**

type PPU40-S3

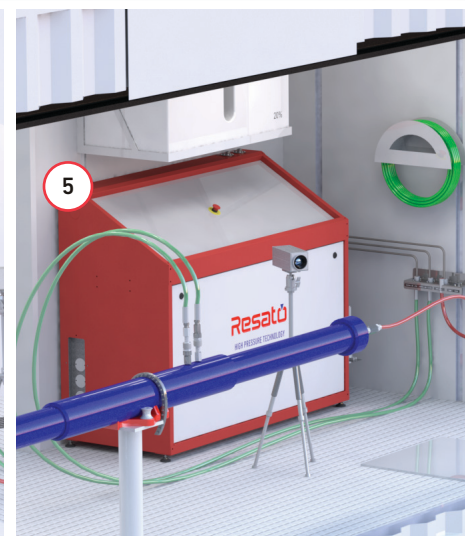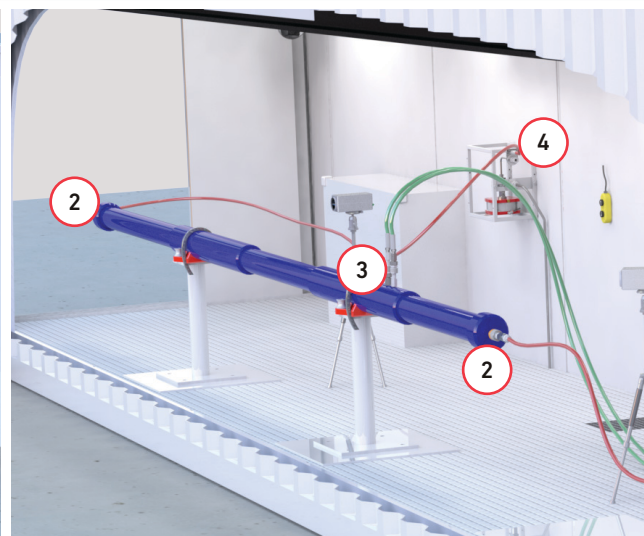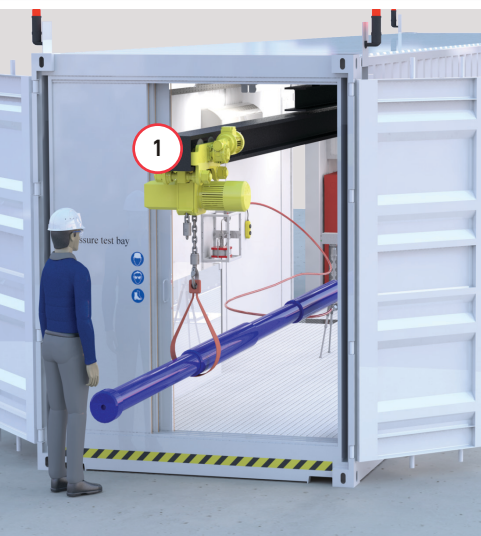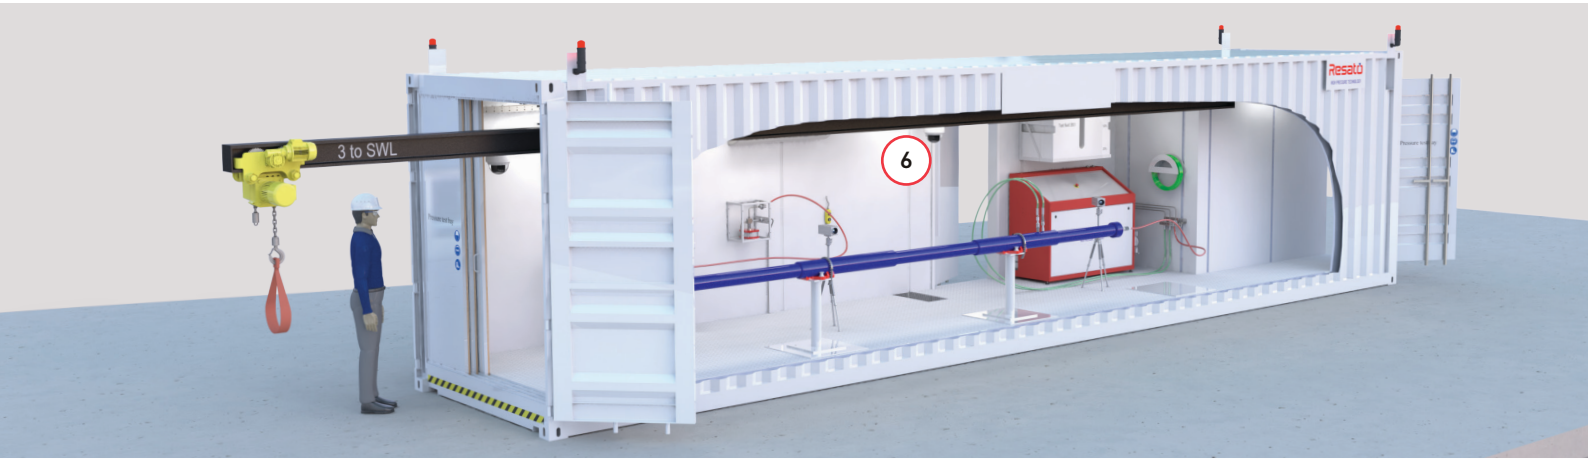



**ITEM**

**DESCRIPTION**

- 1 2 metres electric extendable beam with single 3 tons electric hoist.
- 2 Dual hydrostatic test line 11,500 psi
- 3 Hydraulic open/close line: 10,000 psi
- 4 De-air skid
- 5 Resato high pressure test unit
- 6 Pan, zoom and tilt camera

## CONTAINERIZED PRESSURE TEST BAY (40 FT)

type PPU40-S3

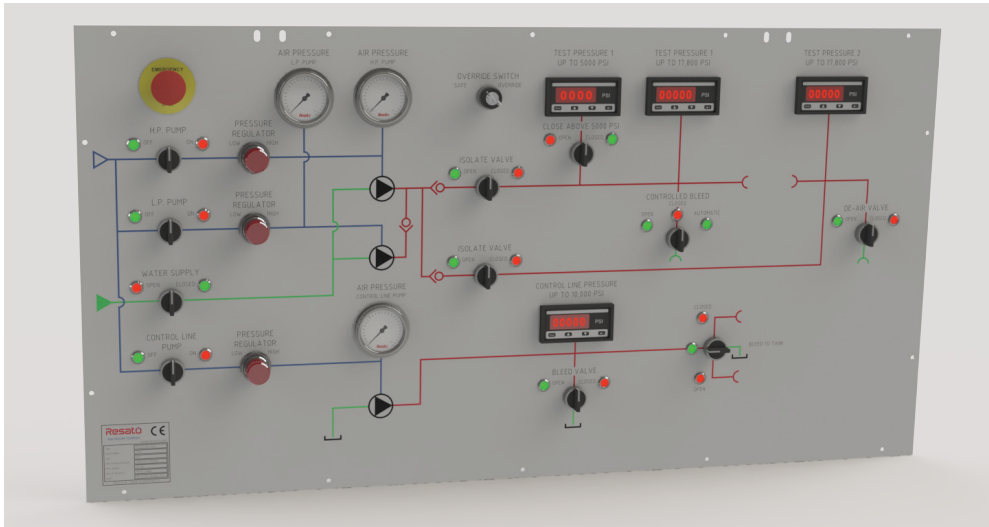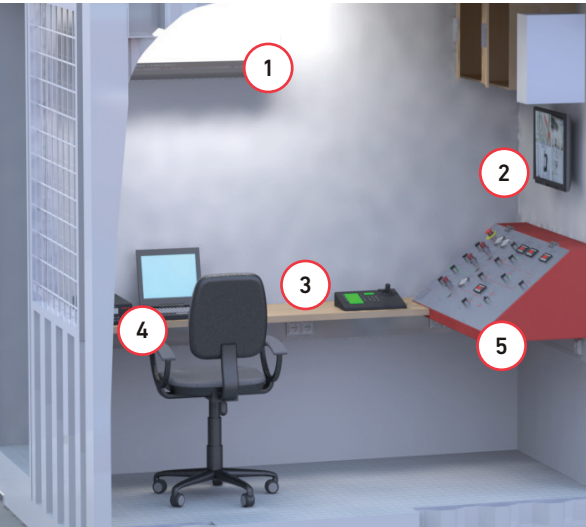

ITEM	DESCRIPTION	MEASUREMENT
1	Air conditioning	<p>Provided with multiple pressure transmitters to ensure absolute accuracy &lt; 3% within range 300 – 10,500 psi.</p> <p>Integrated data acquisition system to generate test certificates</p> <p>Measuring accuracy: 0,5% FS</p>
2	Camera monitor	
3	Camera control	
4	Office desk	
5	Control panel	



### TEST LINES

Dual hydrostatic test line: 11,500 psi

Pump setup by means of low pressure / high volume and high pressure / low volume pump to ensure pressure setting from 300 psi up to 11,500 psi.

Object protection by means of programmable maximum unit pressure and controlled pressure bleed.

De-air skid

### DUAL CONTROL LINE

Hydraulic open/close control line: 10,000 psi


Control lines usable for both open/close as spring returned type valves

Build in 40 litres reservoir

Inline 5 micron high pressure filter

## CONTAINERIZED PRESSURE TEST BAY (40 FT)

type PPU40-S3

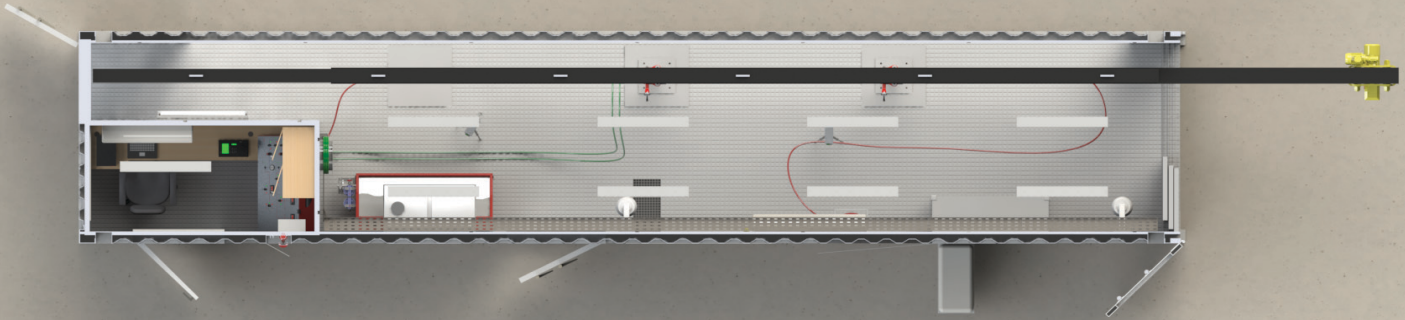

### TECHNICAL SPECIFICATIONS

#### GENERAL

<b>Dimensions 40ft container</b>	12192 x 2438 x 2896 40 x 8 x 9,6	mm ft
<b>Transportation ship</b>	CSC for top layer certified	

#### SAFETY

<b>Test bay wall</b>	10 mm test bay steel (S355J0) wall with 18 mm waterproof plywood inlay for shock absorption
<b>Emergency stop button</b>	Emergency stop on control panel and within test bay
<b>Pressure indication</b>	4x flash lights on container in combination with digital pressure read-outs
<b>Pressure containing areas</b>	No high pressure components outside the test bay
<b>Test bay entrance</b>	Door switches and door locks
<b>Camera</b>	2x pan, zoom and tilt camera 2x camera on tripod
<b>General safety design criteria</b>	According to customer specifications

### Resato international BV

1e Energieweg 13  
9301 LK Roden - Holland

P.O. Box 30  
9300 AA Roden - Holland

hpsales@resato.com  
www.resato.com/highpressure

+31 (0) 50 501 6877  
+31 (0) 50 501 2402